




Single-Output: 5000 W GPIB

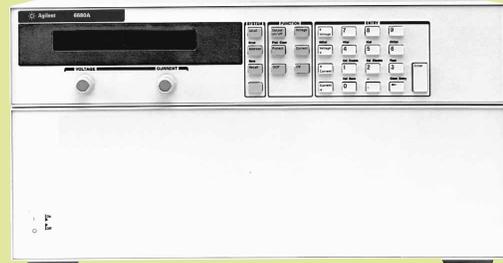

Proven reliability
 Increase test throughput
 with fast up and down programming
 Fast reaction to analog programming signals

Reliable dc power for manufacturing test and long-term burn-in
 This series of 5000 watt dc power supplies has the exceptional, proven reliability that test system engineers look for. It also has the features needed for easy test system integration.

Programming of the dc output and the extensive protection features can be done either from the front panel or using industry standard SCPI commands, via the GPIB. Using the serial link, up to 16 power supplies can be connected through one GPIB address. Test system integration can be further simplified by using the *VXIPlug&Play* drivers. The output voltage and current can also be controlled with analog signals. This is helpful for certain types of noisy environments, and also immediate reactions to process changes.

The 6680A Series has extremely low ripple and noise for a 5000 watt dc power supply. This helps the built-in measurement system make extremely accurate current and voltage measurements.

Selectable compensation is provided for problem-free powering of inductive loads.

Specifications (at 0° to 55° C unless otherwise specified)	6680A	6681A	6682A	6683A	6684A	6680A-J04 Special Order Option
Number of outputs	1	1	1	1	1	1
GPIB	Yes	Yes	Yes	Yes	Yes	Yes
Output ratings						
Voltage	0 to 5 V	0 to 8 V	0 to 21 V	0 to 32 V	0 to 40 V	0 to 3.3 V
Current (40°C then derate linearly 1%/°C from 40°C to 55°C)	0 to 875 A	0 to 580 A	0 to 240 A	0 to 160 A	0 to 128 A	0 to 1000 A
Programming accuracy at 25°C ±5°C						
Voltage	0.04% + 5 mV	8 mV	21 mV	32 mV	40 mV	5 mV
Current	0.1% + 450 mA	300 mA	125 mA	85 mA	65 mA	450 mV
Ripple and noise constant voltage mode from 20 Hz to 20 MHz						
rms	1.5 mV	1.5 mV	1.0 mV	1.0 mV	1.0 mV	3.4 mV
Peak to peak	10 mV	10 mV	10 mV	10 mV	10 mV	15 mV
Readback accuracy at 25°C ±5°C (percent of reading plus fixed)						
Voltage	0.05% + 7.5 mV	12 mV	32 mV	48 mV	60 mV	7.5 mV
Current	0.1% + 600 mA	400 mA	165 mA	110 mA	90 mA	600 mA
Load and line regulation						
Voltage	0.002% + 0.19 mV	0.3 mV	0.65 mV	1.1 mV	1.5 mV	0.19 mV
Current	0.005% + 65 mA	40 mA	17 mA	12 mA	9 mA	77 mA
Transient response time	Less than 900 µs for the output voltage to recover within 150 mV following a change in load from 100% to 50%, or 50% to 100% of the output current rating of the supply					
Supplemental Characteristics	(Non-warranted characteristics determined by design that are useful in applying this product)					
Ripple and noise constant current mode from 20 Hz to 20 MHz						
rms	290 mA	190 mA	40 mA	28 mA	23 mA	—
Average programming resolution						
Voltage	1.35 mV	2.15 mV	5.7 mV	8.6 mV	10.8 mV	12 mV
Current	235 mA	155 mA	64 mA	43 mA	34 mA	260 mA
OVP	30 mV	45 mV	120 mV	180 mV	225 mV	25 mV
Output voltage programming response time	9 ms	12 ms	45 ms	60 ms	60 ms	9 ms
(excludes command-processing time) Full-load programming rise or fall time (10 to 90% or 90 to 10%, resistive load)						
Output common-mode noise current (to signal-ground binding post)						
rms	1.5 mA	1.5 mA	3 mA	3 mA	3 mA	2.0 mA
peak-to-peak	10 mA	10 mA	20 mA	20 mA	20 mA	12.5 mA

Note 1: Option 6680A-J04 is not available outside the USA because certification process is not complete.



Single-Output: 5000 W GPIB (Continued)

Supplemental Characteristics for all model numbers

dc Floating Voltage: Output terminals can be floated up to ± 60 Vdc maximum from chassis ground

Remote Sensing: Up to half the rated output voltage can be dropped in each load lead. The drop in the load leads subtracts from the voltage available for the load.

Command Processing Time: Average time required for the output voltage to begin to change following receipt of digital data is 20 ms for power supplies connected directly to the GPIB

Modulation: (analog programming of output voltage and current):

Input Signal: 0 to -5 V for voltage, 0 to $+5$ V for current

Input Impedance: 30 k Ω /or greater

ac Input (47 to 63 Hz): 180 to 235 Vac (line-to-line, 3 phase), 27.7 A rms maximum worst case, 21.4 A rms nominal; 360 to 440 Vac, 14.3 A rms maximum worst case, 10.7 A rms nominal (maximum line current includes 5% unbalanced phase voltage condition.) Output voltage derated 5% at 50 Hz and below 200 Vac.

Input Power: 7350 VA and 6000 W maximum; 160 W at no load

GPIB Interface Capabilities: SH1, AH1, T6, L4, SR1, RL1, PP0, DC1, DT1, E1, and C0. IEEE-488.2 and SCPI command set.

Size: 425.5 mm W x 221.5 mm H x 674.7 mm D (16.75 in x 8.75 in x 25.56 in)
See page 104 for more details

Weight: Net, 51.3 kg (113 lbs); shipping, 63.6 kg (140 lbs)

Warranty Period: One year

Ordering Information

Opt 208 180 to 235 Vac, 3 phase, 47 to 63 Hz

Opt 400 360 to 440 Vac, 3 phase, 47 to 63 Hz

Opt 602 Two Bus Bar Spacers for paralleling power supplies (p/n 5060-3514)

* **Opt 908** Rack-mount Kit (p/n 5062-3977 and p/n 5063-9212)

* **Opt 909** Rack-mount Kit with Handles (p/n 5063-9221 and p/n 5063-9219).

Opt 0L2 Extra Standard Documentation Package

Opt 0B3 Service Manual

Opt 0B0 No Documentation Package

* Support rails required

Accessories

p/n 5060-3513 Three 30-A Replacement Fuses for 180 to 235 Vac line

p/n 5060-3512 Three 16-A Replacement Fuses for 360 to 440 Vac line

E3663AC Support rails for Agilent rack cabinets

p/n 5080-2148 Serial link cable 2m (6.6 ft.)

Your Requested Excerpt from the Agilent Power Products Catalog

The preceding page(s) are an excerpt from the *2002-2003 Power Products Catalog*.

We hope that these pages supply the information that you currently need.

If you would like to have further information about the extensive selection of Agilent dc power supplies, ac sources, and dc electronic loads, please visit www.agilent.com/find/power to print a copy of the complete Power Products catalog, or to request that a copy be sent to you. You will also find a lot of other useful information on this web site.

In the full Power Products Catalog, you will find that Agilent offers much more than basic power generation. If you need basic, clean, power for your lab bench, it's there. But in each product category, we've also integrated the capabilities that you need for a complete power solution, including extensive measurement and analysis capabilities.

Please give us a call at your local Agilent Technologies sales office, or call a regional office listed below, for assistance in choosing or using Agilent power products.

Keep up to date with Agilent's Test and Measurement Email Updates

As an Email Update subscriber, you will receive periodic customized email updates that match the areas of interest that you have specified. Your update will include products and services, applications and support information, events, and promotions. Sign up today at www.agilent.com/find/emailupdates.

Check off dc power supplies, ac power sources or electronic loads on your registration form, and we will promptly let you know what's new in power products! Our Privacy Statement at www.agilent.com/go/privacy describes our commitment to you regarding your privacy.

To see a copy of the user's guide, please visit our Web site at www.agilent.com/find/manuals

By internet, phone, or fax, get assistance with all your test & measurement needs

Online assistance:
www.agilent.com/find/assist

Phone or Fax

United States:
(tel) 1 800 829 4444

Canada:
(tel) 1 877 894 4414
(fax) (905) 282-6495

China:
(tel) 800-810-0189
(fax) 1-0800-650-0121

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:
(tel) (82-2) 2004-5004
(fax) (82-2) 2004-5115

Latin America:
(tel) (305) 269 7500
(fax) (305) 269 7599

Taiwan:
(tel) 080-004-7866
(fax) (886-2) 2545-6723

Other Asia Pacific Countries:
(tel) (65) 375-8100
(fax) (65) 836-0252
Email: tm_asia@agilent.com

Product specifications and descriptions in this document subject to change without notice.