

Agilent 8542E and 8546A EMI Test Receivers

Data Sheet



Agilent Technologies 8542E: 9 kHz to 2.9 GHz

8542E EMI Receiver

85422E Receiver RF Section

85420E RF Filter Section

Agilent Technologies 8546A: 9 kHz to 6.5 GHz

8546A EMI Receiver

85462A Receiver RF Section

85460A RF Filter Section

These specifications apply to both EMI receivers (Agilent 8542E and 8546A) and both receiver RF sections (Agilent 85422E and 85462A) except where noted.

Frequency Specifications

Tuning Range

Band 1	9 kHz to 50 MHz
Band 2	20 MHz to 2.9 GHz
Band 3	1 GHz to 6.5 GHz*
Bypass	9 kHz to 2.9 GHz (to 6.5 GHz*)
85422E/85462A	9 kHz to 2.9 GHz (to 6.5 GHz*)

Frequency Readout Accuracy

$\pm(\text{frequency readout} \times \text{frequency reference error}^{**} + 1\% \text{ of span} + 20\% \text{ of IF bandwidth} + \text{span accuracy} + 100 \text{ Hz})$

Marker Count Accuracy

Frequency spans ≤ 10 MHz $\pm(\text{marker frequency} \times \text{frequency reference error}^{**} + \text{counter resolution} + 100 \text{ Hz})$

Frequency spans > 10 MHz $\pm(\text{marker frequency} \times \text{frequency reference error}^{**} + \text{counter resolution} + 1 \text{ kHz})$

* For 8546A EMI receiver only

** Frequency reference error = (aging rate \times period of time since last adjustment + initial achievable accuracy + temperature stability)

Specifications

All specifications apply over 0 °C to +55 °C. The EMI receiver will meet its specifications after 2 hours of storage at a constant temperature, within the operating temperature range, 30 minutes after the analyzer is turned on, and after CAL ALL has been run.

Frequency Reference

Aging	$< \pm 1 \times 10^{-7}/\text{year}$
Stability	$< \pm 1 \times 10^{-8}$
Temperature stability	$< \pm 1 \times 10^{-8}$

Frequency Span Accuracy

	Bands 1 and 2	Band 3 and Bypass
Span ≤ 10 MHz	$\pm 2\%$ of span + 10 Hz	$\pm 4\%$ of span
Span > 10 MHz	$\pm 3\%$ of span	$\pm 6\%$ of span

85422E/85462A

Span ≤ 10 MHz	$\pm 2\%$ of span + 10 Hz
Span > 10 MHz	$\pm 3\%$ of span

Counter Resolution

Frequency spans ≤ 10 MHz	Selectable from 10 Hz to 100 kHz
Frequency spans > 10 MHz	Selectable from 100 Hz to 100 kHz

Sweep Time

Range	20 ms to 100 s
Sweep trigger	free run, single, line, video, external



Agilent Technologies

Innovating the HP Way

Amplitude Specifications

Characteristic Noise Indication with CISPR Measurement Bands (0 dB attenuation, 50 Ω input termination)

	Peak	Quasi-Peak	Average
Band A, 9 to 150 kHz (200 Hz BW)			
Preamp off	15 to -15 dBμV	6 to -25 dBμV	3 to -27 dBμV
Preamp on	2 to -28 dBμV	-7 to -29 dBμV	-9 to -31 dBμV
Band B, 150 kHz to 30 MHz (9 kHz BW)			
Preamp off	-3 dBμV	-11 dBμV	-18 dBμV
Preamp on	-8 dBμV	-15 dBμV	-21 dBμV
Band C, 30 MHz to 1 GHz (120 kHz BW)			
Preamp off	9 dBμV	2 dBμV	-5 dBμV
Preamp on	4 dBμV	-2 dBμV	-10 dBμV

System Amplitude Accuracy

	Band 1	Band 2	Band 3*
Specification	9 kHz to 50 MHz	20 MHz to 2.9 GHz	1 to 6.5 GHz
Characteristic	± 2 dB	± 2 dB	± 3 dB

Linear to Log Scale Switching Uncertainty

85422E/85462A ± 0.25 dB at reference level

Display Scale Fidelity

85422E/85462A	
Log maximum cumulative 3 kHz to 3 MHz IF BW ≤ 1 kHz IF BW	(0 to -66 dB from reference level, 0 to -64 dB for Band 3 only) ±(0.3 dB + 0.01 x dB from reference level) ±(0.4 dB + 0.01 x dB from reference level)
Log incremental accuracy	±0.4 dB/4 dB
Linear scale	(0 to -56 dB from reference level; 0 to -54 dB for Band 3 only) ±3% of reference level

Gain Compression

(Specification is derived from measured distortion with a total power at the input mixer of -10 dBm.

If the IF BW ≤ 300 Hz, this applies only if signal separation ≥ 4 kHz and the signal amplitude is ≤ reference level + 10 dB.)

	Band 1	Band 2	Band 3*
200 kHz ≤ f ₀ < 10 MHz	9 kHz to 50 MHz	20 MHz to 2.9 GHz	1 to 6.5 GHz
f ₀ ≥ 10 MHz	< 0.75 dB	< 0.75 dB	< 0.75 dB
Characteristic 1 dB compression point	< 0.5 dB	< 0.5 dB	< 0.5 dB

8542E/8546A

(f₀ ≥ 10 MHz)

Preamp off 89 dBμV 89 dBμV 102 dBμV

Preamp on 77 dBμV 77 dBμV 77 dBμV

(9 kHz < f₀ < 10 MHz)

Preamp off 85 dBμV

Preamp on 72 dBμV

85422E/85462A

(f₀ > 10 MHz)

Preamp off (No bands) 102 dBμV

Preamp on 75 dBμV

(9 kHz ≤ f₀ ≤ 10 MHz)

Preamp off 95 dBμV

Preamp on 68 dBμV

Third Order Intercept Point

f₀ > 200 kHz, signal separation > 50 kHz

8542E/8546A

Preamp off

Band 1	Band 2	Band 3*	Bypass
9 kHz to 50 MHz	20 MHz to 2.9 GHz	1 to 6.5 GHz	9 kHz to 2.9 GHz
97 dBμV	97 dBμV	112 dBμV	112 dBμV
Preamp on	85 dBμV	85 dBμV	85 dBμV

Preamp on 85 dBμV

85422E/85462A

Preamp off (No Bands) 112 dBμV

Preamp on 85 dBμV

* For 8546A EMI receiver only

Amplitude Specifications (continued)

Second Harmonic Intercept Point	Band 1	Band 2	Band 3*
8542E/8546A	9 kHz to 50 MHz	20 MHz to 2.9 GHz	1 to 6.5 GHz
100 kHz $\leq f_0 \leq 1.8$ GHz, > 2.9 GHz			
Preamp off	122 dB μ V	122 dB μ V	134 dB μ V
Preamp on	110 dB μ V	110 dB μ V	100 dB μ V
1.8 GHz $< f_0 \leq 2.9$ GHz			
Preamp off	105 dB μ V		
Preamp on	105 dB μ V		
85422E/85462A	(No bands)		
$f_0 > 200$ kHz			
Preamp off	134 dB μ V		
Preamp on	100 dB μ V		

Other Input Related Spurious -65 dBc (Band 1, Band 2, and Band 3*)


Residual Responses (0 dB attenuation, 50 Ω input termination, preamp on)

8542E/8546A	
< 30 kHz	< -2 dB μ V
> 30 kHz	< -10 dB μ V
85422E/85462A	
9 to 150 kHz	$< +2$ dB μ V
150 kHz to 2.9 (or 6.5 GHz*)	< -8 dB μ V

Displayed Average Noise Level (input terminated, 0 dB attenuation, 50 Ω input termination, 30 Hz IF BW, sample detection 30 Hz averaging BW)

8542E/8546A

$f_0 \leq 400$ kHz

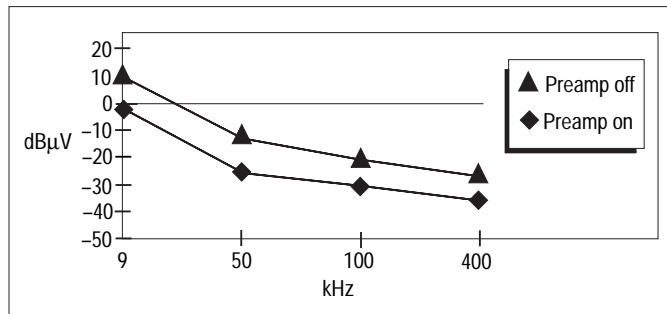


$f_0 > 400$ kHz

	Band 1	Band 2	Band 3*
	9 kHz to 50 MHz	20 MHz to 2.9 GHz	1 to 6.5 GHz
Preamp off	≤ -31 dB μ V	≤ -31 dB μ V	≤ -16 dB μ V
Preamp on	≤ -39 dB μ V	≤ -39 dB μ V	≤ -37 dB μ V

85422E/85462A

$f_0 \leq 400$ kHz

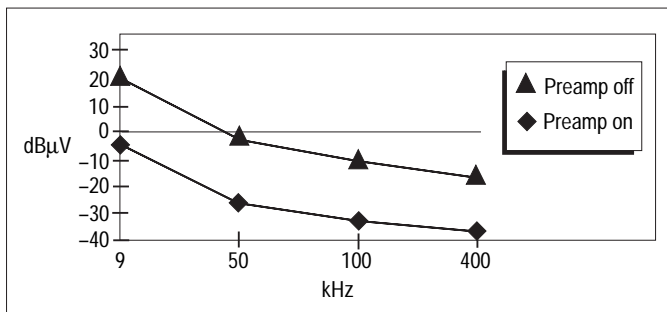

$f_0 > 400$ kHz

Preamp off	≤ -18 dB μ V
Preamp on	≤ -39 dB μ V

* For 8546A EMI receiver only

IF and Display Specifications

IF Bandwidths

Measurement (6 dB)	200 Hz, 9 kHz, 120 kHz (conforms to CISPR Publication 16)
Bandwidth accuracy	1 MHz, 6 dB BW $\pm 10\%$
Diagnostic (3 dB)	30 Hz to 300 kHz in 1-3-10 steps ($\pm 20\%$ characteristic), also 3 MHz and 5 MHz

Demodulation

AM and FM

Inputs and Outputs Specifications

Front Panel Inputs

8542E/8546A	
Low frequency	Type-N female, 50 Ω nominal
High frequency	Type-N female, 50 Ω nominal
85422E/85462A	Type-N female, 50 Ω nominal

Maximum Safe Input Level

8542E/8546A	
dc voltage	0 V
Average continuous power	
9 kHz to 2.9 GHz	137 dB μ V (30 dBm)
1 GHz to 6.5 GHz*	137 dB μ V (30 dBm) with ≥ 10 dB input attenuation
Peak pulsed power	
Band 1 (9 kHz to 50 MHz)	2 kW peak for 10 μ s, > 20 dB input attenuation
Band 2 (20 MHz to 2.9 GHz)	100 W peak for < 10 μ s, <1% duty cycle and > 30 dB input attenuation
85422E/85462A	
dc voltage	0 V (dc coupled), 50 V (ac coupled)
Average continuous power	
9 kHz to 2.9 GHz	137 dB μ V (30 dBm)
2.9 GHz to 6.5 GHz*	137 dB μ V (30 dBm) with 10 dB input attenuation
Peak pulsed power	50 dBm (100 W) for 10 μ s pulse width and 1% duty (Preamp off) cycle, input attenuation ≥ 30 dB

Input Attenuation

8542E/8546A	
Input attenuator	0 to 50 dB in 10 dB steps
Linearity test attenuator	4 dB
85422E/85462A	
Input attenuator	0 to 70 dB in 10 dB steps

Input Filter Bandwidths (all 3 dB bandwidths are characteristics)

9 to 74 kHz	fixed
74 to 198 kHz	fixed
198 to 525 kHz	fixed
525 to 1025 kHz	fixed
1 to 2 MHz	fixed
2 to 6 MHz	tunable (20% 3 dB bandwidth)
6 to 17 MHz	tunable (10% 3 dB bandwidth)
17 to 29 MHz	tunable (7% 3 dB bandwidth)
29 to 52 MHz	tunable (8% 3 dB bandwidth)
52 to 98 MHz	tunable (6% 3 dB bandwidth)
98 to 152 MHz	tunable (6% 3 dB bandwidth)
152 to 216 MHz	tunable (6% 3 dB bandwidth)
216 to 330 MHz	tunable (5% 3 dB bandwidth)
330 to 500 MHz	tunable (5% 3 dB bandwidth)
0.5 to 1 GHz	tunable (4% 3 dB bandwidth)
1 to 2.9 GHz	fixed
2.9 to 6.5 GHz*	fixed

Averaging Bandwidths

30 Hz to 1 MHz in 1-3-10 steps
($\pm 30\%$ characteristic) and 3 MHz.
Post-detection single pole
low-pass filters. 1, 3 and 10 Hz
digital filters with anti-aliasing

Detectors

Measurement	Peak, Quasi-Peak and Average Quasi-Peak time constants conform with CISPR Publication 16
Overload	
8542E/8546A	Broadband RF (Bands 1 and 2 only) and IF
85422E/85462A	IF

Preamplification

8542E/8546A	
Bands 1 and 2	12 dB
Band 3* and BYPASS	27 dB ± 4 dB
85422E/85462A	27 dB ± 1.5 dB ≤ 500 MHz, ± 4 dB > 500 MHz

Input VSWR


0 dB input attenuation	
≤ 1.0 GHz	2 : 1
1.0 GHz < $f_0 \leq 2.9$ GHz	2.5 : 1
10 dB input attenuation	
≤ 1.2 GHz	1.2 : 1
1.2 GHz < $f_0 \leq 1.7$ GHz	1.3 : 1
1.7 GHz < $f_0 \leq 2.9$ GHz	1.6 : 1

Front Panel Outputs

Tracking generator	Type-N female, 50 Ω nominal
85422E/85462A only	
Probe power	+15 Vdc $\pm 7\%$ at 150 mA max -12.6 Vdc $\pm 10\%$ at 150 mA max
Earphone jack	1/8 in monoaural jack
Calibrator signal	Type-N female, 50 Ω nominal, 300 MHz, -20 dBm ± 0.4 dB negative detector
External ALC	

Rear Panel Inputs and Outputs

10 MHz REF OUTPUT	BNC female, 50 Ω
Output amplitude	> 0 dBm
EXT REF IN	BNC female
Frequency	10 MHz
Input amplitude range	-2 to 10 dBm

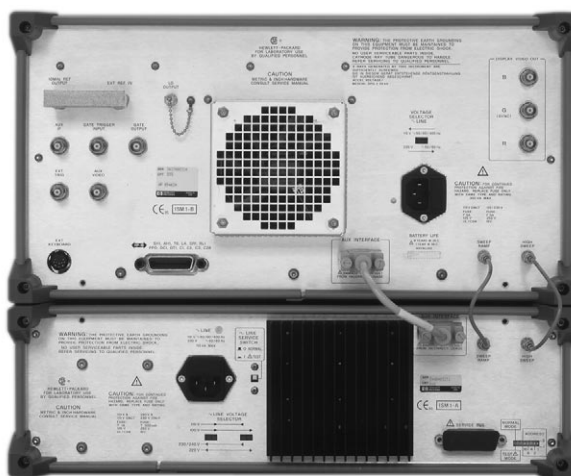

* For 8546A EMI receiver only

Inputs and Outputs Specifications (continued)

AUX IF OUT	BNC female, 50 Ω	SWEEP INPUT/OUTPUT	
Frequency	21.4 MHz	85422E/85462A	SMA female
Amplitude range	-10 to -60 dBm	Output	0 to 10 V ramp
AUX VIDEO OUT	BNC female	85420E/85460A	SMA female
Amplitude range	0 to 1 V (uncorrected)	Input	0 to 10 V
EXT KEYBOARD	Interface compatible with HP C1405A Option ABA keyboard and most IBM/AT non auto-switching keyboards	REMOTE INTERFACE	
EXT TRIG INPUT	BNC female	85422E/85462A	GPIB
Trigger level	Positive edge initiates sweep in EXT TRIG mode (TTL)	Option 023	RS-232
LO OUTPUT	SMA female, 50 Ω	85420E/85460A	GPIB compatible service port (for use by qualified repair personnel only)
Frequency range	3.0 to 6.8214 GHz	MONITOR OUTPUT	R,G, B (composite video on G)
HI-SWEEP IN/OUT			25 kHz horizontal rate
85422E/85462A	SMA female,	AUX INTERFACE	60 Hz vertical rate
Output	high=sweep,	85422E/85462A only	9-pin subminiature "D"
Input	low=retrace (TTL)		
85420E/85460A	open collector, low stops sweep		
Output	SMA female		
	high=sweep,		
	low=retrace (TTL)		

Tracking Generator Specifications

Output Frequency Range	9 kHz to 2.9 GHz
Output Power Level	
Range	-1 to -66 dBm
Resolution	0.1 dB
Vernier	
Range	9 dB
Accuracy (25 ° \pm 10 °C)	
(-20 dBm at 300 MHz,	\pm 0.2 dB / dB
16 dB attenuation)	\pm 0.5 dB total
Incremental cumulative	
Output attenuator range	0 to 56 dB in 8 dB steps
Output Power Sweep	
Range	(-10 to -1 dBm)-(source attenuator setting)
Resolution	0.1 dB

General Specifications

EMI Compatibility	Measurement characteristics are in compliance with CISPR Publication 16-1. IF has 6 dB measurement bandwidths of use above or below 1 GHz. Receiver is compliant with CISPR 11/1990, Group 1, Class B and EN 50082-1/1992	
Storage Media	Internal 3.5-inch disk drive. 1.44 MByte DOS and LIF format	
Temperature Range		
Operating	0 to 55 °C	
Storage Media	5 to 45 °C	
Storage	-20 to 65 °C	
Power Requirements	Voltage	Power Consumption
8542E/8546A	90 to 132 V_{rms} , 47 to 440 Hz	On<615 VA; <265 W
	198 to 264 V_{rms} , 47 to 66 Hz	Off<5 W
Receiver RF section	90 to 132 V_{rms} , 47 to 440 Hz	On<500 VA; <180 W
	198 to 264 V_{rms} , 47 to 66 Hz	Off<5 W
RF filter section	90 to 132 V_{rms} , 47 to 440 Hz	On<115 VA; <85 W
	198 to 264 V_{rms} , 47 to 66 Hz	Off=0 W

General Specifications (continued)

Dimensions

8542E/8546A

Width	458 mm (18 inches)
Height	368 mm (14 3/8 inches)
Depth	644 mm (25 3/8 inches)
Weight	49 kg (108 lb)

85422E/85462A

Width	458 mm (18 inches)
Height	235 mm (9 1/4 inches)
Depth	644 mm (25 3/8 inches)
Weight	28.1 kg (62 lb)

85420E/85460A

Width	458 mm (18 inches)
Height	133 mm (5 1/4 inches)
Depth	644 mm (25 3/8 inches)
Weight	20.9 kg (46 lb)

Model and Option Listing

Complete EMI receiver	8542E	8546A
Receiver RF section	85422E	85462A
RF filter section	85420E	85460A
Option 0B1	Add extra manual set	
Option 1CM	Rack mount kit	
Option 023	Substitutes RS-232 for GPIB interface	
Option W30	Three year return to Agilent service	
Option UK6	Calibration data	

Accessories

92203K	GPIB to Centronics adapter. No ac adapter included. Order 82241A adapter with the appropriate country option: ABA - United States ABB - Europe ABG - Australia ABJ - Japan ABU - United Kingdom
HP C1405B	101-key, enhanced PC keyboard
85460-20036	Replacement semi-rigid cable for front panel
8120-8154	Replacement flexible cable for rear panel (for high sweep or sweep ramp)
8120-6337	Replacement auxilliary bus cable

Supported Printers

Note: Printers with GPIB interfaces can be connected directly to the GPIB port on the receiver RF section. Printers with parallel (Centronics) interfaces require a GPIB to Centronics adapter. Printers with RS-232 interfaces can be connected directly to the receiver RF section if Option 023 is installed.

HP DeskJet printers	HP DeskJet, DeskJet Plus, DeskJet Portable, 310, 320, 340, 500, 500C, 520, 540, 550C, 560C, 600, 660C, 850C and 1600C
HP LaserJet printers	I, II, III, IV, 4, 4L, 4P, 4 Plus and 5P
Other HP printers	HP ThinkJet, QuietJet, PaintJet
Others	Canon BJ-10ex, Epson MX-80, Epson FX-85, Epson LQ-570, Kodex Diconix 180si and Panasonic Kx-P1091i

Related LiteratureAgilent 85875A Commercial Conducted EMI
Measurement Software**Pub. Number**

5964-1968E

Agilent 85876A Commercial Radiated EMI
Measurement Software

5962-9450E

Agilent 85878A EMI Report Generator

5965-6473E

Agilent 85869PC EMI Measurement Software

5965-2885E

**Agilent Technologies' Test and Measurement
Support, Services, and Assistance**

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

"Our Promise" means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

"Your Advantage" means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

Get assistance with all your test and measurement needs at:
www.agilent.com/find/assist

Product specifications and descriptions in this document subject to change without notice.

Copyright © 1997, 2000 Agilent Technologies
Printed in U.S.A. 5/00
5965-7096E

**Agilent Technologies**

Innovating the HP Way