

Model SR1030

RESISTANCE STANDARDS & INSTRUMENTS

- Part-per-million transfers from 100 mΩ to 1 MΩ
- Thermally isolated by oil for maximum short-term thermal stability
- Excellent long-term stability; ±20 ppm for 6 months
- Accuracy calibrated to ±10 ppm
- Seven decades of resistance transfer-1, 10, 100, 1 k, 10k and 100kΩ/step
- 100:1 resistance transfers using series, parallel, series/parallel connection
- Calibration readings traceable to the NIST are provided

Extremely Accurate and Stable

The Model SR1030 provides the part-per-million (ppm) resistance transfer accuracies and the long-term stabilities you need in today's modern metrology and calibration laboratories.

The SR1030 Resistance Transfer Standards are extremely accurate, stable resistance standards that are used on the bench and are light enough to carry with you to remote calibration, repair, production or R&D sites. The SR1030 consists of six transfer standards in decades from 1 Ω to 100 kΩ per step. Each decade standard consists of 12 nominally equal resistors matched initially to within 10 ppm. In addition, each decade standard produces three decade values – 10 resistors in series (10R), 10 resistors in parallel (R/10), and nine of the 10 resistors in series/parallel (R). By making a 1:1 comparison with the tenth resistor, you can resolve a series-parallel value to better than 1 ppm.

Resistance Transfer Standard System

Oil Immersion Provides Thermal Isolation

All standards, except the 100 kΩ/step standard, are immersed in a mineral oil bath. Oil immersion provides thermal isolation to minimize the effects of ambient temperature variations. This means maximum short-term thermal stability for the standards. The SR1030 also exhibits superior long-term stability (±20 ppm of nominal for six months; ±35 ppm for two years; ±50 ppm typical for five years). This gives you longer mean time between calibrations, increasing your calibration throughput.

As an added benefit, the oil speeds the dissipation of heat created in the resistors during calibration. This heat dissipation further contributes to the stability of the standards.

Gaskets seal the SR1030 to keep the work surface and measuring contacts clean. The gaskets also minimize oil aging and contamination to lengthen the time between oil changes.

Since the 100 kΩ standard can be measured at much lower bridge power than the lower value standards, it is not necessary to immerse the standard in oil. However, this standard still benefits from the thermal lagging effects because

it is sealed in a chamber using insulating materials that provide approximately the same temperature lagging effects as oil.

Refining Resistance Technology

TEGAM's experience in design and manufacture of resistance standards has made TEGAM's standards highly respected throughout government and industry. The SR1030 incorporates all the features of the SR1010 Resistance Transfer Standards with the many benefits of a sealed oil bath.

Ideal as a Multi-Value Standard Resistor or Reference Voltage Divider

The high accuracy and precision of the individual resistors make the SR1030 ideal for use as a multi-value standard resistor or reference voltage divider. The superior stability of the SR1030 makes it particularly suitable for calibrating 6-1/2, 7-1/2 and 8-1/2 digit digital multimeters.

Certified Traceable to the NIST

The SR1030 Resistance Transfer Standard System is certified traceable to the National Institute of Standards and Technology. You can use the SR1030 to transfer this traceability to your resistance standards and measuring equipment. Certified calibration data is supplied with every standard.



TEGAM®

YOUR GLOBAL SOURCE FOR TEST
AND MEASUREMENT SOLUTIONS

Model SR1030

RESISTANCE TRANSFER STANDARD SYSTEM

Specifications

Nominal Values (per step)

1, 10, 100, 1 k, 10 k and 100 kΩ

Transfer Accuracy

100:1 ±(1 ppm + 0.1 μΩ) at parallel value, using SB103, PC101, and SPC102 as necessary
 10:1 ±(1 ppm + 0.1 μΩ) at series or parallel value, using SB103, PC101, and SPC102 as necessary

Initial Adjustment

±20 ppm of nominal value matched within 10 ppm

Calibration Accuracy

±10 ppm, NIST traceable

Calibration Conditions

23 ±1°C, low-power, four-terminal measurement, initial calibration readings are provided

Long-Term Resistance Stability

±20 ppm of nominal for 6 months
 ±35 ppm for 2 years
 ±50 ppm for 5 years, typical

Temperature Coefficient

1 Ω ±15 ppm/°C, matched within 5 ppm/°C
 10 Ω ±1 ppm/°C
 100 Ω to 100 kΩ ±5 ppm/°C, matched within 3 ppm/°C

Power Coefficient (typical)

1 Ω ±0.3 ppm/mW/resistor
 10 Ω ±0.02 ppm/mW/resistor
 100 Ω to 100 kΩ ±0.1 ppm/mW/resistor

Maximum Power Rating

Single Step 1W/step
 10 resistors 5W/distributed

Leakage Resistance

1 Ω to 10 kΩ >10¹² Ω terminal to case
 100 kΩ >10¹³ Ω terminal to case

Breakdown Voltage

1500 volts peak to case

Oil Bath

Type Mineral oil, Penreco
 Drakeol #9, white

Insulation

Resistance Typically 10¹⁴ Ω cm
 Quantity Approximately 0.5 gallons

Dimensions (with oil)


Height 4.7 in (120 mm)
 Width 4.6 in (117 mm)
 Depth 13.2 in (335 mm)
 Mass Weight 10 lbs (6.35 kg)

Operating Environment

Temperature 22.8 ±3.3°C (73±6°F)
 Humidity 20 to 50% relative humidity

Safe Operating Environment

Temperature 0 to 50°C (32 to 126°F)
 Humidity 15 to 80% relative humidity

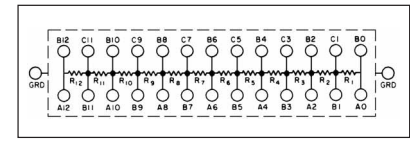

Maximum Current and Voltage Capabilities

SR1030 Resistance Value Per Step	One Resistor Alone Maximum I, V	10 Resistors in Parallel (R/10) Maximum I, V	10 Resistors in Series (R10) Maximum I, V
1 Ω	1.0 A, 1.0 V	7.07 A, 707 mV	707 mA, 7.07 V
10 Ω	316 mA, 3.16 V	2.23 A, 2.23 V	223 mA, 22.3 V
100 Ω	100 mA, 10 V	707 mA, 7.07 V	70.7 mA, 70.7 V
1 kΩ	31.6 mA, 31.6 V	223 mA, 22.3 V	22.3 mA, 233 V
10 kΩ	10 mA, 100 V	70.7 mA, 70.7 V	7.07 mA, 707 V

* Based on the breakdown voltage of 1500 volts peak to case

Order Information

SR1030 Resistance Transfer

Standard System:

Standard System:	Part No.
1 Ω Resistance Transfer Std.	SR1030-1
10 Ω Resistance Transfer Std.	SR1030-10
100 Ω Resistance Transfer Std.	SR1030-100
1 kΩ Resistance Transfer Std.	SR1030-1 K
10 kΩ Resistance Transfer Std.	SR1030-10 K
100 kΩ Resistance Transfer Std.	SR1030-100 K

Options:

SB103 Shorting Bars	SB103
PC101 Parallel Compensation Network	PC101
SPC102 Series/Parallel Compensation Network	SPC102

Calibration & Technical Services

For warranty and remedial repair, calibration services and spare parts, or for additional information on TEGAM sales and service offices around the world, contact us at **440-466-6100 (ph)** or **440-466-6110 (fx)**.

Combined Option Functional Specifications

Resistor Grouping	Ten Resistors in Parallel	Nine Resistors in Series/Parallel	Ten Resistors in Series
Nominal Value (Relative to Individual Resistor Value R)	0.1R	R	10R
Four-Terminal Measurement	Resistance Added to Value Calculated from Individual Resistor Values (Value and Tolerance in Microhms)		
With SB103 and PC101 or SPC102	0 ±0.1 μΩ	0 ±1 μΩ	–
With SB103 Alone	50 ±10 μΩ	200 ±40 μΩ	–
With No Accessories	–	–	0 ±10 μΩ
Two-Terminal Measurement			
With SB103	150 ±30 μΩ	300 ±60 μΩ	–
With No Accessories	–	–	300 ±60 μΩ

This data sheet was current when it was produced. However, products are constantly being updated and improved. Because of this some differences may occur between the descriptions herein and the current product. Prices and specifications may be changed without notice.



YOUR GLOBAL SOURCE FOR TEST AND MEASUREMENT SOLUTIONS

TEN TEGAM WAY • GENEVA, OHIO 44041
 440-466-6100 • FAX 440-466-6110
 www.tegam.com • e-mail: sales@tegam.com