

# SPECIFICATIONS



## Physical - Instrument Only

Height: 4.7 inches (120 mm)  
Width: 9.5 inches (240 mm)  
Depth: 2.4 inches (60 mm)  
Weight: 2.75 pounds (1.2 kg)

## Physical - Instrument with Nylon Carrying Case

Height: 6 inches (152 mm)  
Width: 11 inches (280 mm)  
Depth: 4.5 inches (115 mm)  
Weight: 4.75 pounds (2.15 kg)

## Environmental:

Operating Temperature: 0° C to 50° C (32° F to 122° F)  
Storage Temperature: -20° C to 60° C (-4° F to 140° F)  
Humidity: 95% maximum relative, non-condensing

## Power:

Battery: Internal, rechargeable, 7.2 V Nickel metal hydride  
Charging Source: External 12 VAC transformer, 1.3 A  
Operating Time: Greater than 10 hours, continuous, without backlight

## Display:

320 x 240 dot-matrix liquid crystal display with electroluminescent backlighting

**Horizontal Resolution:** 1 foot (0.1 m) at any VOP

**Vertical Resolution:** 14 bits with 203 dots displayed

**Vertical Sensitivity:** Greater than 56 dB

**Output Signal:** Pulse widths of 5, 25, 100 nsec, 1 usec

**Output Balance:** Variable

## Distance Accuracy:

+/- 0.5 ft (0.15 m) plus +/- 0.01% of reading

## Maximum Ranges:

63,700 ft (19.4 km) at 99% VOP  
38,600 ft (11.8 km) at 60% VOP  
*Range varies with VOP. Maximum testable cable lengths varies with pulse width and cable type.*

## Input Protection:

400 V (AC+DC) from DC to 400 Hz, decreasing to 10 V at 1 MHz

## Velocity of Propagation:

*Two user-selectable display formats*  
VOP (%) with 2 digit precision ranging from 30% to 99%  
V/2 with 3 digit precision ranging from 45 to 148 in meters mode or from 148 to 487 in feet mode

## Waveform Storage: 6144 samples per waveform

Standard: 4 SUPER-STORE waveforms  
Optional: 16 SUPER-STORE waveforms

## Noise Filters:

Standard: 8x, 50/60 Hz, Auto  
Optional: 4x, 16x, 32x, 64x, 128x Averaging

## Standard Accessories:

Operator's manual, 12 VAC charger, nylon carrying case, telco test leads

## Optional Accessories:

Extended waveform memory storage, Additional noise filters, Extended warranty

*Technological advances allow changes in specifications and/or components. Changes may be made without notification.*

**Y2K**  
COMPLIANT

**CE**  
CERTIFIED

Radiodetection Ltd.  
Western Drive, Bristol. BS14 0AF United Kingdom  
Tel: +44 (0) 117 976 7776 Fax: +44 (0) 117 976 7775 E-mail: rd.sales.uk@spx.com

Radiodetection  
154 Portland Road, Bridgton, ME 04009 USA  
Tel: (207) 647 9495 Toll Free: (877) 247 3797 Fax: (207) 647 9496  
E-mail: rd.sales.us@spx.com



**Riser Bond**  
AN SPX BRAND

# Model 3300

Metallic Time Domain Reflectometer

Cable Fault Locator

*Designed for the twisted pair cable installer / technician.*



# RESTORE THE SERVICE


**Model 3300 TDR, Cable Fault Locator, is one of the fastest, most accurate test methods for locating problems on twisted pair cable. The instrument's easy operation and field durability make the Model 3300 a valuable troubleshooting tool.**

## THE INSTRUMENT


Model 3300 is a handheld metallic TDR designed specifically for fault locating in a variety of twisted pair cable applications, such as telephone, LAN, signaling, utilities, and avionics.

Designed for easy operation and engineered for accuracy, Model 3300 tests for opens, shorts, sheath faults, broken or loose conductors, load coils, bridged taps, water damage, crimps, cuts, smashed cables, and more!

The Model 3300 is housed in a high impact ABS plastic case and further protected by a nylon carrying bag, which provides storage for connectors and Operator's manual. The high resolution Liquid Crystal Display shows the live waveform of the cable under test, plus useful data such as distance to the fault, pulse width, balance control setting, and battery charge level. The built-in backlight is ideal when testing in a low light environment.

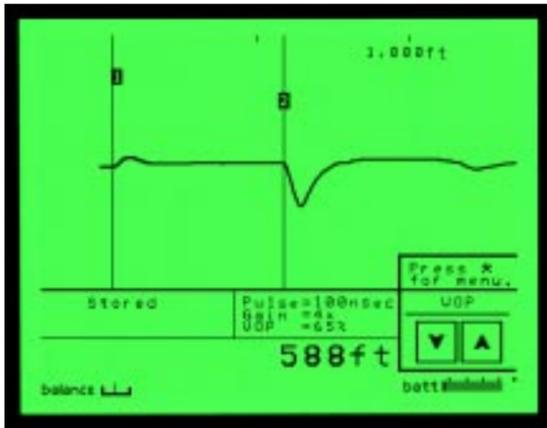

Selected functions and operations are controlled by the keypad, such as waveform position, horizontal zoom, vertical gain, cursors, range, contrast, and backlight. A popup menu is easily accessible for additional functions. Riser-Bond Instruments' unique popup menu system allows the operator to select and use a function while the waveform is active.

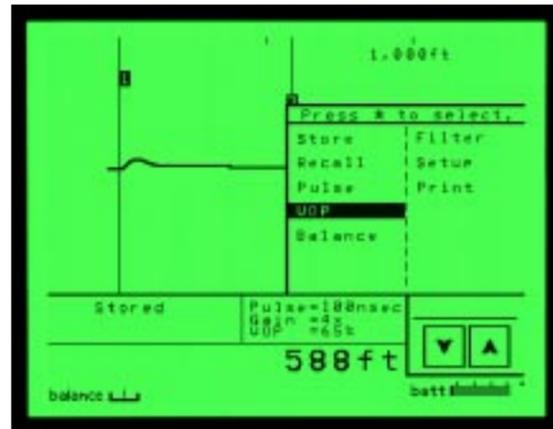

A balanced test port minimizes the blind spot associated with the TDR test pulse and matches the instrument to the cable under test. This helps locate faults close to the instrument.

The high energy, rechargeable batteries keep the instrument ready for service calls. The small size and lightweight packaging is convenient for all aerial and underground applications. The rugged, splashproof casing is ideal for outside environments.

The low price of the Model 3300 allows an instrument for every technician. More instruments in the field means faster repair and return to service, reduced customer repeats, improved customer relations, and increased revenue!

# FEATURES & BENEFITS

Exclusive features, such as RANGE-PLUS, Noise Filters, SUPER-STORE, and Intermittent Fault Detection (IFD) provide the Model 3300 with superior functions and test capabilities.

RANGE-PLUS steps through preset ranges to quickly scan the cable for faults. Each range consists of a specific pulse width, vertical gain, and distance of cable.

Eliminate unwanted waveform noise with multi-level software filtering.

Use the exclusive SUPER-STORE waveform data storage to store both on-screen and off-screen cable waveform information. Move the cursors, change the VOP, and increase or decrease the vertical gain and horizontal zoom settings, *even on stored waveforms!*

Monitor and locate hard-to-find intermittent faults using the Intermittent Fault Detection (IFD) mode. Manual operation is always available to move the waveform position, change the VOP, and adjust the gain and zoom settings, without having to restart the IFD test.



## World leaders



Radiodetection is a proud member of the SPX group of companies, which provide technical products and service solutions worldwide.

Radiodetection and its associated companies specialize in the design and manufacture of products for the location and maintenance of underground pipes and cables. Our aim is to be viewed as the supplier of choice of 'high performance' quality equipment using advanced product technologies. We are also committed to both design innovation and customer support.

## Technical support



Radiodetection equipment users have easy access to technical support. A call to your regional representative, or the Radiodetection head office, will put you in contact with our team of field-experienced technical experts.

## Servicing and repair



Radiodetection has a team of factory-trained service technicians and dedicated service facilities. Turnaround is fast, and costs are very competitive.

## Training



Product training for your operators and training personnel is available on your site, or at Radiodetection's headquarters. Training is with qualified instructors and each trainee receives a certificate to confirm they have received the training.

### America

#### Radiodetection

154 Portland Road  
Bridgton, ME 04009, USA  
Tel: +1 (207) 647 9495  
Toll Free: +1 (877) 247 3797  
Fax: +1 (207) 647 9496  
Email: [rd.sales.us@spx.com](mailto:rd.sales.us@spx.com)  
Web: [www.radiodetection.com](http://www.radiodetection.com)

#### Pearpoint

72055 Corporate Way  
Thousand Palms CA 92276, USA  
Tel: +1 800 688 8094  
Tel: +1 760 343 7350  
Fax: +1 760 343 7351  
Email: [pearpoint.sales.us@spx.com](mailto:pearpoint.sales.us@spx.com)  
Web: [www.radiodetection.com](http://www.radiodetection.com)

#### Radiodetection (Canada)

344 Edgeley Boulevard, Unit 34  
Concord, Ontario L4K 4B7, Canada  
Tel: +1 (905) 660 9995  
Toll Free: +1 (800) 665 7953  
Fax: +1 (905) 660 9579  
Email: [rd.sales.ca@spx.com](mailto:rd.sales.ca@spx.com)  
Web: [www.radiodetection.com](http://www.radiodetection.com)

### Europe

#### Radiodetection Ltd (UK)

Western Drive  
Bristol BS14 0AF, UK  
Tel: +44 (0) 117 976 7776  
Fax: +44 (0) 117 976 7775  
Email: [rd.sales.uk@spx.com](mailto:rd.sales.uk@spx.com)  
Web: [www.radiodetection.com](http://www.radiodetection.com)

#### Radiodetection (France)

13 Grande Rue, 76220  
Neuf Marché, France  
Tel: +33 (0) 232 8993 60  
Fax: +33 (0) 235 9095 58  
Email: [rd.sales.fr@spx.com](mailto:rd.sales.fr@spx.com)  
Web: <http://fr.radiodetection.com>

#### Radiodetection (Benelux)

Industriestraat 11  
7041 GD 's-Heerenberg, Netherlands  
Tel: +31 (0) 314 66 47 00  
Fax: +31 (0) 314 66 41 30  
Email: [rd.sales.nl@spx.com](mailto:rd.sales.nl@spx.com)  
Web: <http://nl.radiodetection.com>

#### Radiodetection (Germany)

Groendahlscher Weg 118  
46446 Emmerich am Rhein, Germany  
Tel: +49 (0) 28 51 92 37 20  
Fax: +49 (0) 28 51 92 37 520  
Email: [rd.sales.de@spx.com](mailto:rd.sales.de@spx.com)  
Web: <http://de.radiodetection.com>

### Asia-Pacific

#### Radiodetection (Asia-Pacific)

Room 708, CC Wu Building  
302-308 Hennessy Road, Wan Chai  
Hong Kong SAR, China  
Tel: +852 2110 8160  
Fax: +852 2110 9681  
Email: [rd.sales.cn@spx.com](mailto:rd.sales.cn@spx.com)  
Web: [www.radiodetection.com](http://www.radiodetection.com)

#### Radiodetection (China)

Hongfu Mansion, Room 61622  
Zheng Ge Zhuang, Bei Qi Jia Town  
Chang Ping District  
Beijing 102209, China  
Tel: +86 (0) 10 8975 5540  
Fax: +86 (0) 10 8975 5640  
Email: [rd.service.cn@spx.com](mailto:rd.service.cn@spx.com)  
Web: <http://cn.radiodetection.com>

#### Radiodetection (Australia)

Unit 14, 5-7 Prosperity Parade  
Warriewood NSW 2102, Australia  
Tel: +61 (0) 2 9979 8555  
Fax: +61 (0) 2 9979 7733  
Email: [rd.sales.au@spx.com](mailto:rd.sales.au@spx.com)  
Web: [www.radiodetection.com](http://www.radiodetection.com)

To see the full range of products and services provided by Radiodetection visit:

[www.radiodetection.com](http://www.radiodetection.com)

Radiodetection products are under continuous development and are subject to change, we reserve the right to alter or amend any published specification without notice.

Copyright 2008 Radiodetection Ltd. - SPX Corporation. All rights reserved. Radiodetection Ltd. is a subsidiary of SPX Corporation.



**Radiodetection**  
AN SPX COMPANY