

Errata

Title & Document Type: 16074A Calibration R-L Standard Operating Note

Manual Part Number: 16074-90001

Revision Date: July 1981

About this Manual

We've added this manual to the Agilent website in an effort to help you support your product. This manual provides the best information we could find. It may be incomplete or contain dated information, and the scan quality may not be ideal. If we find a better copy in the future, we will add it to the Agilent website.

HP References in this Manual

This manual may contain references to HP or Hewlett-Packard. Please note that Hewlett-Packard's former test and measurement, life sciences, and chemical analysis businesses are now part of Agilent Technologies. The HP XXXX referred to in this document is now the Agilent XXXX. For example, model number HP8648A is now model number Agilent 8648A. We have made no changes to this manual copy.

Support for Your Product

Agilent no longer sells or supports this product. You will find any other available product information on the Agilent Test & Measurement website:


www.agilent.com

Search for the model number of this product, and the resulting product page will guide you to any available information. Our service centers may be able to perform calibration if no repair parts are needed, but no other support from Agilent is available.

HP 16074A

OPERATING NOTE

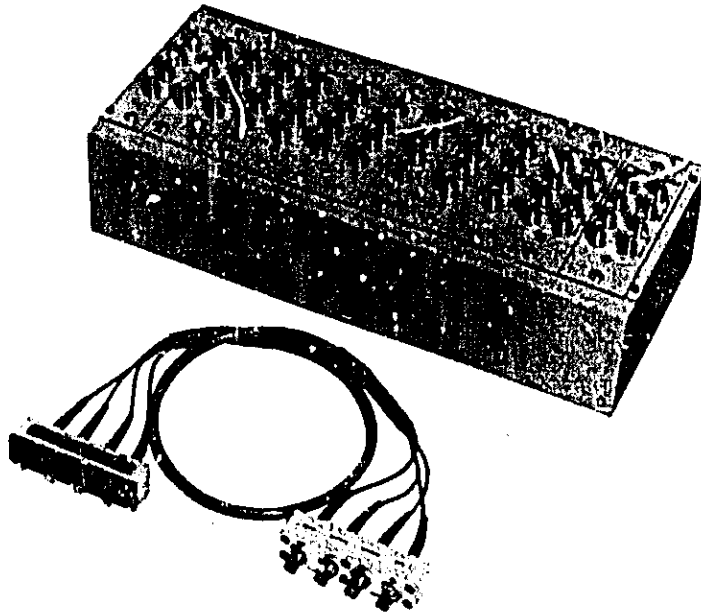16074A
CALIBRATION R-L STANDARD



JUL. 1981

 **HEWLETT
PACKARD**

HP 16074A

WARRANTY AND ASSISTANCE

All Hewlett-Packard products are warranted against defects in materials and workmanship. This warranty applies for one year from the date of delivery, or, in the case of certain major components listed in the operating manual, for the specified period. We will repair or replace products which prove to be defective during the warranty period provided they are returned to Hewlett-Packard. No other warranty is expressed or implied. We are not liable for consequential damages.

For any assistance, contact your nearest Hewlett-Packard Sales and Service Office. Addresses are provided at the back of this manual.

1. INTRODUCTION

This operating note provides the information necessary to use the Model 16074A calibration R-L standard, shown pictorially on the front cover. Included is a description of the 16074A, its specifications, the internal construction of each standard, and other basic information. Specifications are listed in Table 1.

2. DESCRIPTION

The 16074A is specially designed for calibration and performance testing of HP's various four-terminal-pair type LCR meters. It consists of eight resistance standards-- 0Ω , 0.1Ω , 1Ω , 10Ω , 100Ω , $1k\Omega$, $10k\Omega$, and $100k\Omega$ --two quasi-inductance standards-- $100\mu H$ and $100mH$ --and two terminations--OPEN and SHORT. The state-of-the-art four-terminal-pair configuration of the 16074A insures high accuracy at frequencies up to 13MHz. The 0Ω through 10Ω standards contain thin film resistors that have minimal residual reactance and stray capacitance; the 100Ω through $100k\Omega$ standards are each shielded to reduce the effects of noise.

3. OPEN AND SHORT TERMINATIONS

The 16074A's OPEN and SHORT terminations facilitate optimum open and short zero offset compensation of the test instrument to insure accurate measurements. Before calibrating the test instrument with any capacitance, inductance, or resistance standards, open and short zero offset compensation must be performed. For details, refer to the test instrument's Operation Manual.

4. RESISTANCE STANDARDS

The nominal value of each resistance standard is specified at DC and is extended up to 13MHz. The high frequency characteristics are based on the appropriate series or parallel equivalent circuit calculations. The 100Ω , $1k\Omega$, $10k\Omega$, and $100k\Omega$ standards are designed for resistance measurement calibration; thus, nominal value accuracy is $\pm 0.1\%$. The 0.1Ω , 1Ω , and 10Ω standards, however, are designed for phase accuracy calibration. They have extremely low residual reactance, and are calibrated for their phase accuracy rather than resistance accuracy. Basic accuracy is, thus, $\pm 10\%$.

Note

The SHORT termination and the 0Ω resistance standard should not be used interchangeably. The SHORT

termination is an absolute short, intended for short zero offset compensation in capacitance, inductance, and resistance measurements calibration. The 0Ω standard, however, is not an absolute 0Ω . It, like the 0.1Ω , 1Ω , and 10Ω standards, is intended for phase measurement calibration only. Before calibrating the test instrument's phase measurement accuracy, perform zero offset compensation using the 0Ω standard and OPEN termination. In all other cases, use the SHORT and OPEN terminations.

5. QUASI-INDUCTANCE STANDARDS

Because of the inherent parasitic impedances (coil resistance and distributed capacitance) of inductors, it is not possible to build an inductance standard usable in the RF region. Therefore, each of the two quasi-inductance standards in the 16074A is constructed using two resistors and one capacitor, offering equivalent inductances of $100\mu H$ and $100mH$. The internal construction is illustrated in Table 2 and the equivalent circuits are shown in Table 1.

6. CONNECTING THE 16074A

The 16074A can be connected to the test instrument in one of two ways: (1) directly to the instrument's UNKNOWN terminals or (2) via the furnished four-terminal-pair cable (P/N: 16074-61600). Either connection method can be used without affecting the measurement accuracy of the instrument. SHORT and OPEN zero offset compensation must be performed, though, to cancel the residual inductance, residual resistance, and stray capacitance of the cable. Also, when the cable is used and the test signal frequency is higher than 1MHz, the test instrument must be set to the appropriate cable length. Refer to the test instrument's Operation and Service Manual for details.

7. CALIBRATION DATA

Calibration data for each resistance standard at DC and each quasi-inductance standard at several test frequencies are given on the calibration data sheet included in the 16074A.

8. CALIBRATION CYCLE

The recommended calibration cycle of the 16074A is once a year.

9. REPAIR

The 16071A is not field repairable. If any of the standards or terminations are damaged or if a significant nominal value change is observed,

return the unit to Hewlett-Packard for service. For complete information on service or calibration, contact the nearest Hewlett-Packard office.

Table-1. Specifications.

Contents:

Resistors --- 0Ω, 0.1Ω, 1Ω, 10Ω, 100Ω, 1kΩ, 10kΩ and 100kΩ

Terminations --- open and short

Inductors --- 100μH and 100mH

Useable frequency: DC to 13MHz

Accessory furnished:

1m cable --- HP P/N: 16074-61600

Environmental temperature:

23°C ± 5°C

Characteristics:

Nominal Value	Equivalent Circuit	Parameter Main/Sub	Calibration Accuracy	Typical Frequency Characteristic	Typical Temperature Coefficient
0.1Ω ± 10% *1		Rs	±0.1% at DC	$\pm \frac{f^2 \text{MHz}}{1000} \%$	±100 PPM
		Ls	0 ± 1nH up to 1MHz	---	---
1Ω ± 10% *1		Rs	±0.1% at DC	$\pm \frac{f^2 \text{MHz}}{1000} \%$	-60 PPM
		Ls	±0.2nH at 1MHz	---	---
10Ω ± 10% *1		Rs	±0.03% at DC	$\pm \frac{f^2 \text{MHz}}{1000} \%$	-60 PPM
		Ls	0 ± 1nH up to 10MHz	---	---
100Ω ± 0.1%		Rs	±0.03% at DC	$\pm \frac{f^2 \text{MHz}}{1000} \%$	±10 PPM
		Ls	±20nH at 1MHz	---	---
1kΩ ± 0.1%		Rp	±0.03% at DC	$\pm \frac{f^2 \text{MHz}}{1000} \%$	±10 PPM
		Cp	±0.2pF at 1MHz	---	---
10kΩ ± 0.1%		Rp	±0.03% at DC	$\pm \frac{2f^2 \text{MHz}}{100} \%$	±10 PPM
		Cp	±0.2pF at 1MHz	---	---
100kΩ ± 0.1%		Rp	±0.03% at DC	$\pm 2f^2 \text{MHz} \%$	±10 PPM
		Cp	±0.2pF at 1MHz	---	---
100mH ± 2kΩ		Ls	100nF measurement error + 0.1%	$\pm 10f^2 \text{MHz} \%$	±10 PPM
		Rs	±0.03% at DC	$\pm \omega L D$ *4	---
100μH ± 632Ω		Ls	1000pF measurement error + 0.2%	$\pm 4 \left(\frac{f \text{MHz}}{10} \right)^2 \%$	±10 PPM
		Rs	±0.03% at DC	$\pm \omega L D$ *4	---

*1 The calibration values of 0.1Ω thru 10Ω resistors are defined as the difference (respectively resistance and residual reactance) on the basis of 0Ω.

*2 Rs is equal to R1 plus R2.

*3 This equation includes a compensation of the stray capacitance associated with the BNC terminals.

*4 D is the dissipation value of the capacitor at the respective setting frequencies.






Dimensions:

423(W) x 120(H) x 186(W) mm

Weight:

Approximately 4.4kg

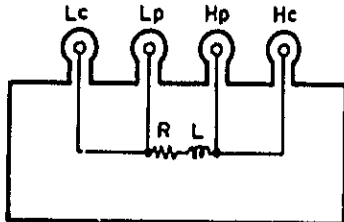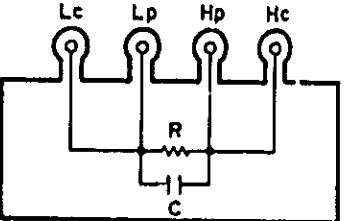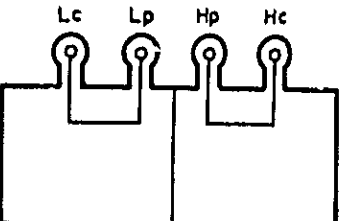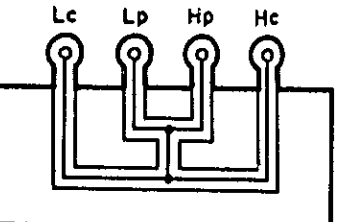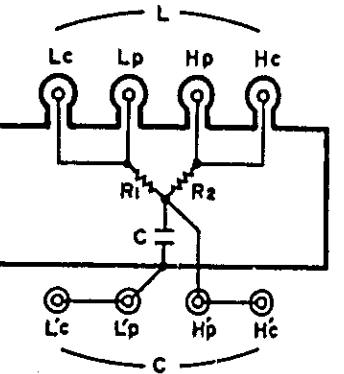Table 2. Construction of Each Standard

Standard	Use	Construction
0Ω	Termination for zero offset adjustment (short: cancellation of residual inductances and resistances) prior doing frequency phase accuracy check.	
0.1Ω 1Ω 10Ω	Frequency phase accuracy check.	
100Ω 1kΩ 10kΩ 100kΩ	Resistance measurement accuracy check.	
Open Termination	Termination for zero offset adjustment (open: cancellation of stray capacitance) to perform accurate measurements.	
Short Termination	Termination for zero offset adjustment (short: cancellation of residual inductances and resistances) to perform accurate measurements.	
100μH 100mH	Inductance measurement accuracy check.	

MANUAL CHANGES

MANUAL CHANGES

16074A

CALIBRATION R-L STANDARD

MANUAL IDENTIFICATION

Model Number: 16074A

Date Printed: JUL. 1981

Part Number: 16074-90000

This supplement contains important information for correcting manual errors and for adapting the manual to instruments containing improvements made after the printing of the manual.

To use this supplement:

Make all ERRATA corrections.

Make all appropriate serial number related changes indicated in the tables below.

SERIAL PREFIX OR NUMBER	MAKE MANUAL CHANGES	SERIAL PREFIX OR NUMBER	MAKE MANUAL CHANGES
ALL	ERRATA		

► NEW ITEM

ERRATA

- Page 2, Table 1, Specifications,

Change the Ls Calibration Accuracy for the 1 Ω resistor as follows:

C.V. \pm 0.2nH at 1MHz

C.V. = Calibrated Value

- Page 3, Table 2, Construction of Each Standard,

Change the figures for the 100 μ H and 100mH quasi-inductors as follows:

NOTE

Manual change supplements are revised as often as necessary to keep manuals as current and accurate as possible. Hewlett-Packard recommends that you periodically request the latest edition of this supplement. Free copies are available from all HP offices. When requesting copies quote the manual identification information from your supplement, or the model number and print date from the title page of the manual.

Date/Div: JAN. 10, 1983/33

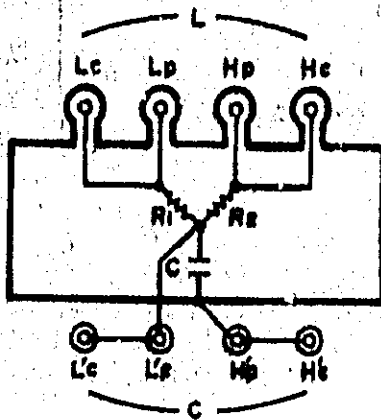
Page 1 of 2



SECRET

PORTACITRONEI JA...

SECRET



SECRET

SECRET

SECRET