



GENERAL SPECIFICATIONS

OPERATION

Constant Current: 0 to selected full scale current
 Prog. Accuracy
 (Range): (high/med) ranges: $\pm 0.25\%$
 (low) range: $\pm 0.5\%$

Regulation: $\pm 0.1\%$ of selected full scale

Constant Resistance: Constant Resistance mode operates in Amps/Volt, IEEE units entered in ohms or A/V

Prog. Accuracy: $\pm 3\%$ of selected full scale

Regulation: $\pm 3\%$ of selected full scale

Constant Voltage: 0 to selected selected full scale

Prog. Accuracy

(Range):

(high/med) ranges: $\pm 0.25\%$

(low): $\pm 0.5\%$

Regulation: $\pm 0.15\%$ of selected full scale

Constant Power: 0 to full scale power

Prog. Accuracy: $\pm 3\%$ of full scale

Regulation: $\pm 3\%$ of full scale

ANALOG MODE

Ext. Prog: 0 to 10 Volts input yields 0 to selected full scale loading in all operating modes.

Input Impedance: 330k Ohms

Prog. Response: Limited by internal adjustable slew rate limiter

PULSE MODE

Frequency: 0.06Hz to 20kHz

Accuracy: 0.1%

Duty Cycle: 10 - 90%(Analog)

Accuracy: 0.1%

Adjustable Slew Rate:

Max: 0 to full scale in 10 μ S

Min: 0 to full scale in 10ms

OUTPUT SIGNALS

Current Sample Output:

Scaling: 10 Volts = selected full scale

Accuracy: $\pm 0.5\%$ of selected full scale

Sync Output:

Timing: Synchronous with pulse generator.

Output: Sink with 10k pull up to +15V

PROTECTION

Current Limit:

Analog Models: Approximately 105% of selected full scale current

Voltage Limit:

Analog Models: Load disconnect at 105% of selected full scale voltage

Power Limit:

Analog Models: Approximately 4250 Watts

Thermal: Load disconnect at internal temperature of 105°C

Undervoltage: Load inhibited at less than 1 Volt, when enabled

MISCELLANEOUS

AC Input: User Selectable 100VAC, 120VAC, 200VAC, 240VAC, $\pm 10\%$, 48 - 62 Hz @ 350W

Ambient Temp: 0°C to 40°C

SAFE OPERATING AREA & SPECIFICATIONS

Like the 2000W analog model, the RBL 800 watt analog programmable series has no compromise on performance, while adding a simple analog interface. Sleek and compact, the 800W model is ready to address all low-to-mid power load and test requirements. The analog programmable RBL 800W series provides all modes of operation, all functions, full scale range switching and master/slave paralleling standard. The 800W RBL model allows the customer the ultimate in flexibility when it comes to decision time! Stand alone or 19 inch rack mountable (see accessories page 33) unit will meet or exceed all your performance, reliability and quality expectations.

- High Speed Adjustable Slew Rate
- Pulse Load Shaping
- Front Panel or Remote Control
- Full Range Switching

RBL 100-120-800

OPERATING RANGES (FULL SCALES)

Voltage: 10 Volts, 50 Volts, 100 Volts
Current: 2 Amps, 20 Amps, 120 Amps
Power: 800 Watts

Short Circuit: 0.007 Ohms max.

CONSTANT RESISTANCE RANGES


High Ohms Mode

Range	2A	20A	120A
10V	0-.1 A/V	0-1 A/V	0-6 A/V
50V	0-.02 A/V	0-.2 A/V	0-1.2 A/V
100V	0-.01 A/V	0-.1 A/V	0-.6 A/V

Low Ohms Mode

Range	2A	20A	120A
10V	0-.1 A/V	0-10 A/V	0-60 A/V
50V	0-.2 A/V	0-2 A/V	0-12 A/V
100V	0-.1 A/V	0-1 A/V	0-6 A/V

INPUT CHARACTERISTICS:

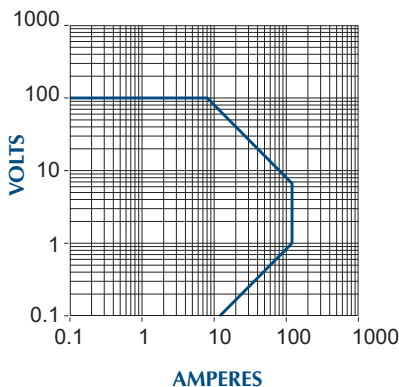

RBL 400-120-800

OPERATING RANGES (FULL SCALES)

Voltage: 20 Volts, 200 Volts, 400 Volts
Current: 2 Amps, 20 Amps, 120 Amps
Power: 800 Watts

Short Circuit: 0.03 Ohms max.

CONSTANT RESISTANCE RANGES


High Ohms Mode

Range	2A	20A	120A
20V	0-.05 A/V	0-.5 A/V	0-3 A/V
200V	0-.005 A/V	0-.05 A/V	0-.3 A/V
400V	0-.0025 A/V	0-.025 A/V	0-.15 A/V

Low Ohms Mode

Range	2A	20A	120A
20V	0-.5 A/V	0-5 A/V	0-30 A/V
200V	0-.05 A/V	0-.5 A/V	0-3 A/V
400V	0-.025 A/V	0-.25 A/V	0-1.5 A/V

INPUT CHARACTERISTICS:

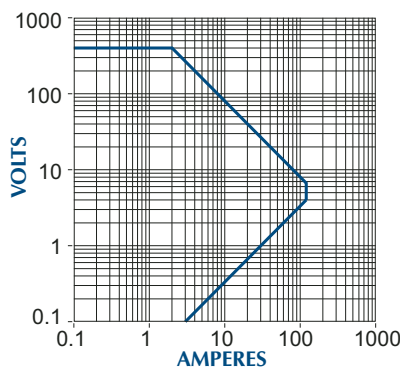

RBL 600-40-800

OPERATING RANGES (FULL SCALES)

Voltage: 20 Volts, 200 Volts, 600 Volts
Current: 2 Amps, 20 Amps, 40 Amps
Power: 800 Watts

Short Circuit: 0.035 Ohms max.

CONSTANT RESISTANCE RANGES


High Ohms Mode

Range	2A	20A	40A
20V	0-.05 A/V	0-.5 A/V	0-1 A/V
200V	0-.005 A/V	0-.05 A/V	0-.1 A/V
400V	0-.0025 A/V	0-.025 A/V	0-.05 A/V


Low Ohms Mode

Range	2A	20A	40A
20V	0-.5 A/V	0-5 A/V	0-10 A/V
200V	0-.05 A/V	0-.5 A/V	0-1 A/V
400V	0-.025 A/V	0-.25 A/V	0-.5 A/V

INPUT CHARACTERISTICS:

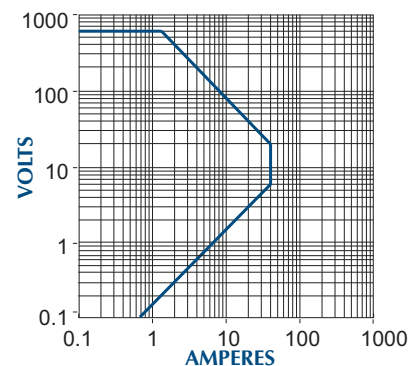

800W OUTLINE

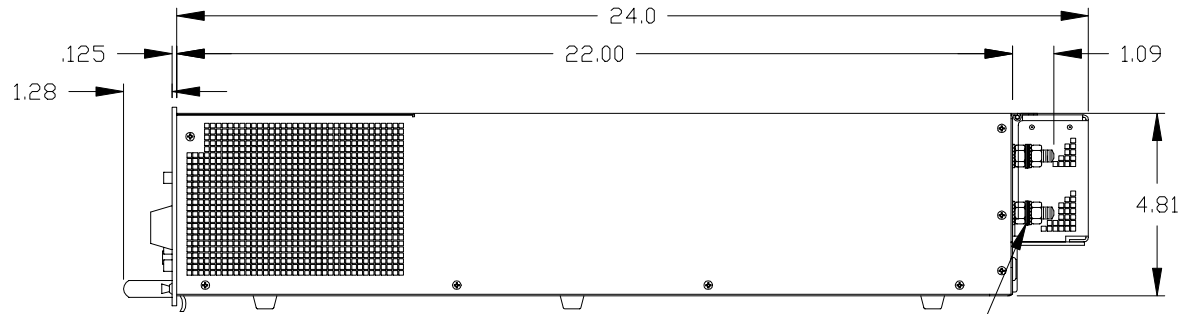

5/16-18 INPUT STUDS

(SAFETY COVER NOT SHOWN)

