


LIGHTWAVE TEST EQUIPMENT

Optical Time Domain Reflectometer – Optical Loss Test Set/Power Meter

HP 8146A, 8140A


381

- High-resolution and long-range capability in one module
- Automatic link characterization in less than 7 seconds
- Optional built-in printer and floppy disk drive

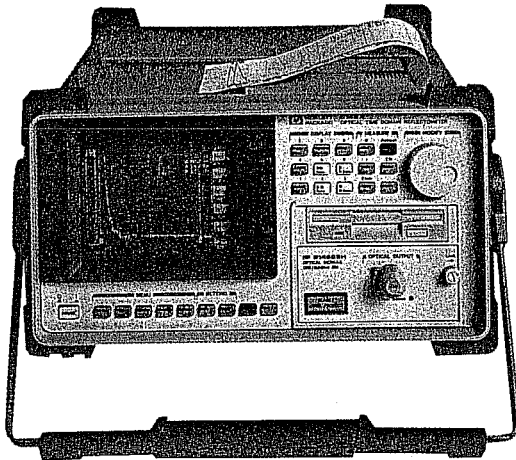

HP 8146A

- Modular design
- Sources and sensors for all common wavelength ranges
- Standalone LED source, power meter and loss test set

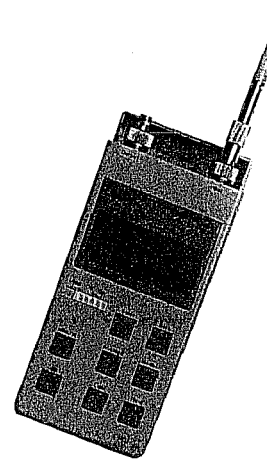

HP 8140A with 81401A sensor module and 81412A LED source module

HP 8146A Optical Time Domain Reflectometer

The HP 8146A is a high-performance optical time domain reflectometer for installation, field maintenance, and bench applications. Plug-in modules are available for all common wavelengths and single-mode fibers.

Each module can be used as a high-resolution or long-range module (switch-selectable). With 30 dB dynamic range and 3 m event deadzone in one module (HP 81462SM), the complete link can be tested. In less than 7 seconds the HP 8146A will automatically characterize the link with up to 100 reflective and non-reflective events. The minimum detectable splice loss is 0.05 dB.

For documentation purposes, the HP 8146A features an optional built-in printer and 3.5-inch floppy disk drive.

Specifications

Module	HP 81462SH	HP 81463SH	HP 81465SH
Central Wavelength	1310 ± 20 nm	1550 ± 20 nm	1310/1550 ± 20 nm
Dynamic Range	30 dB	27 dB	30/27 dB
Event Deadzone	3 m	3 m	3 m
Attenuation Deadzone	30 m	40 m	30/40 m

Span: 1 to 200 km

Read-out resolution: 0.1 m, 0.0001 mi, 0.1 ft

Distance accuracy: ±0.5 m ± sample spacing ± meas. distance × 10⁻⁴

Compare mode: Two waveforms can be compared on screen

Laser safety class: 21 CFR class 1, Cenelec 3A

Dimensions: 190 mm H × 340 mm W × 465 mm D (7.5 in × 13.4 in × 18.3 in)

Weight: Net, 15 kg (33 lb), including one module

Ordering Information

	Price
HP 8146A Optical Time Domain Reflectometer	\$12,100
Opt 001 Additional DC Input	\$770
Opt 003 3.5-inch Floppy Disk Drive	\$250
Opt 002 Thermal Printer	\$1,100
HP 81462SH 1310 nm, Single-Mode Module	\$14,250
HP 81463SH 1550 nm, Single-Mode Module	\$17,500
HP 81465SH 1310/1550 nm, Single-Mode Module	\$23,750
HP 81460SA MS-DOS PC-Based OTDR Emulation Software	\$1,050
HP 81000AI/FI/GI/KI/SI/VI/WI Connector Interface (each)	\$155

HP 8140A Optical Loss Test Set/Power Meter

The HP 8140A is a compact, lightweight instrument for hand-held operation in the installation and maintenance of optical links and component characterization. It may be configured as a power meter, a stand-alone source, or a loss test set.

As a power meter, it is an ideal tool for the measurement of the output power of transmitter modules and of power levels at the fiber end, and for the check for "dark" fibers.

The HP 8140A, in a standalone source or loss test set configuration, covers all wavelengths commonly used in datacom LANs and telecommunications networks. Its main applications include the insertion loss of optical passive components and the total link loss to check for power budgets.

Specifications

Power Meter/Sensor	HP 81400A	HP 81401A
Wavelength Range:	400 to 1100 nm	750 to 1700 nm
Fiber Type:	up to 100/140 μm	up to 100/140 μm
Measurement Range:	+10 to -70 dBm 1 pW to 10 mW	+3 to -70 dBm 1 pW to 2 mW
Noise Floor:	<3 pW pp	<3 pW pp
Measurement Uncertainty:	±5%	±5%
Calibrated Wavelength:	660/780/820/850 nm	820/850/1300/1550 nm
Sensor Element:	Si	InGaAs

Loss Test Set/Source	HP 81411A	HP 81412A	HP 81413A
Wavelength (μm):	850 ± 10	1300 ± 20	1550 ± 20
Spectral Bandwidth (μm) (FWHM):	<50 nm	<140 nm	<200 nm
Output Power (Into 50/125 μm):*	> -17 dBm	> -20 dBm	> -25 dBm
Dynamic Range (Into 50/125 μm):*	> 53 dB	> 50 dB	> 45 dB
Stability (15 min, cons. temp, 0° to 40° C):**	±0.03 dB	±0.03 dB	±0.03 dB

* Typically 20 dB less into single-mode fiber.

** After 5-min. warmup.

Size: 185 mm H × 81 mm W × 41 mm D (7.2 in × 3.2 in × 1.6 in)

Weight: Net, 600 g (incl. source, sensor, 4 batteries and 2 connector interfaces)

Ordering Information

	Price
HP 8140A Optical Loss Test Set (mainframe)	\$580
HP 81400A Optical Sensor 400 to 1100 nm	\$370
HP 81401A Optical Sensor 750 to 1700 nm	\$770
HP 81411A LED Module 850 nm	\$790
HP 81412A LED Module 1300 nm	\$1,350
HP 81413A LED Module 1550 nm	\$1,900
HP 81000AI/FI/GI/VI/KI/SI/VI/WI Connector Interface	\$155 each
HP 8140CC Carrying Case	\$110