

## Riser Bond 1205CX Datasheet

Presented courtesy of AccuSource Electronics



toll-free (800) 673-4102

Visit us at

<https://accusrc.com>

For all of your test equipment needs

- Sales
- Service
- Rentals

Quality Equipment

Low Prices

Huge Selection

The following information is provided as a courtesy.

All content remains the property of the original copyright holder.




# Model 1205CX

Metallic Time Domain Reflectometer  
Cable Fault Locator



*Sensitive to a Fault*

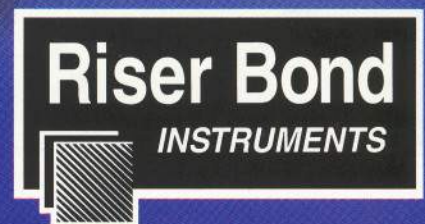



# The best TDR just got better!

Innovative new and existing features make the Model 1205CX the most versatile and cost effective TDR available today! The sub-nanosecond pulse width enables the operator to find small faults that can plague high bandwidth systems or can cause digital signal interruption.



- ◆ Locate cable faults in all coaxial and twisted pair applications.
- ◆ Identify small, often unsuspected faults that may be within inches of each other by using the sub-nanosecond pulse width.
- ◆ Use the exclusive SUPER-STORE waveform data storage to store both on-screen and off-screen cable waveform information. The operator can move the cursors, change the VOP, and increase or decrease the gain and zoom settings, *even on stored waveforms!*
- ◆ Live, stored, and multiple waveform display.
- ◆ RS-232 Port with WAVE-VIEW for Windows software. Cable waveform information can be analyzed, stored, compared, adjusted, and printed on your computer while your TDR goes back into the field.
- ◆ Monitor and locate hard-to-find intermittent faults using the Intermittent Fault Detection (IFD) mode.
- ◆ Automatic fault severity calculation and display.
- ◆ AUTO-SEARCH and manual cursor placement.

- ◆ Measure between any two points on the waveform using unique dual independent cursors.
- ◆ Eliminate unwanted waveform noise with multi-level filtering.
- ◆ Range feature pre-sets pulse width and distance measurements.




## A sub-nanosecond pulse width for superior cable fault location.

In the past, it was not as important to be able to detect small imperfections in coaxial cable. Today, communications systems are pushing the upper bandwidth and cable quality is critical. Small faults are a big problem.


Model 1205CX, with a new sub-nanosecond pulse, pinpoints faults which cause micro-reflections that interrupt digital signals. Now, you can locate previously undetected problems which occur only at higher frequencies.

These waveforms show two tests of the same cable. The test on the left uses the 2 nanosecond pulse width. The

test on the right uses the new sub-nanosecond pulse width.

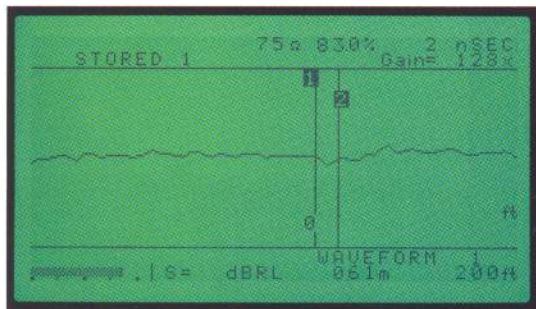


1205CX, 2 nanosecond, 128x gain

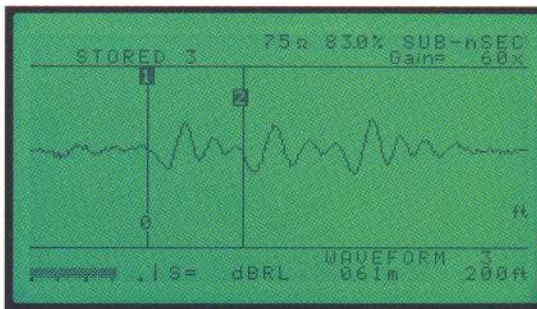

1205CX, sub-nanosecond, 60x gain

Using Riser-Bond Instruments' Model 1205CX with the sub-nanosecond pulse width results in superior fault location and resolution.



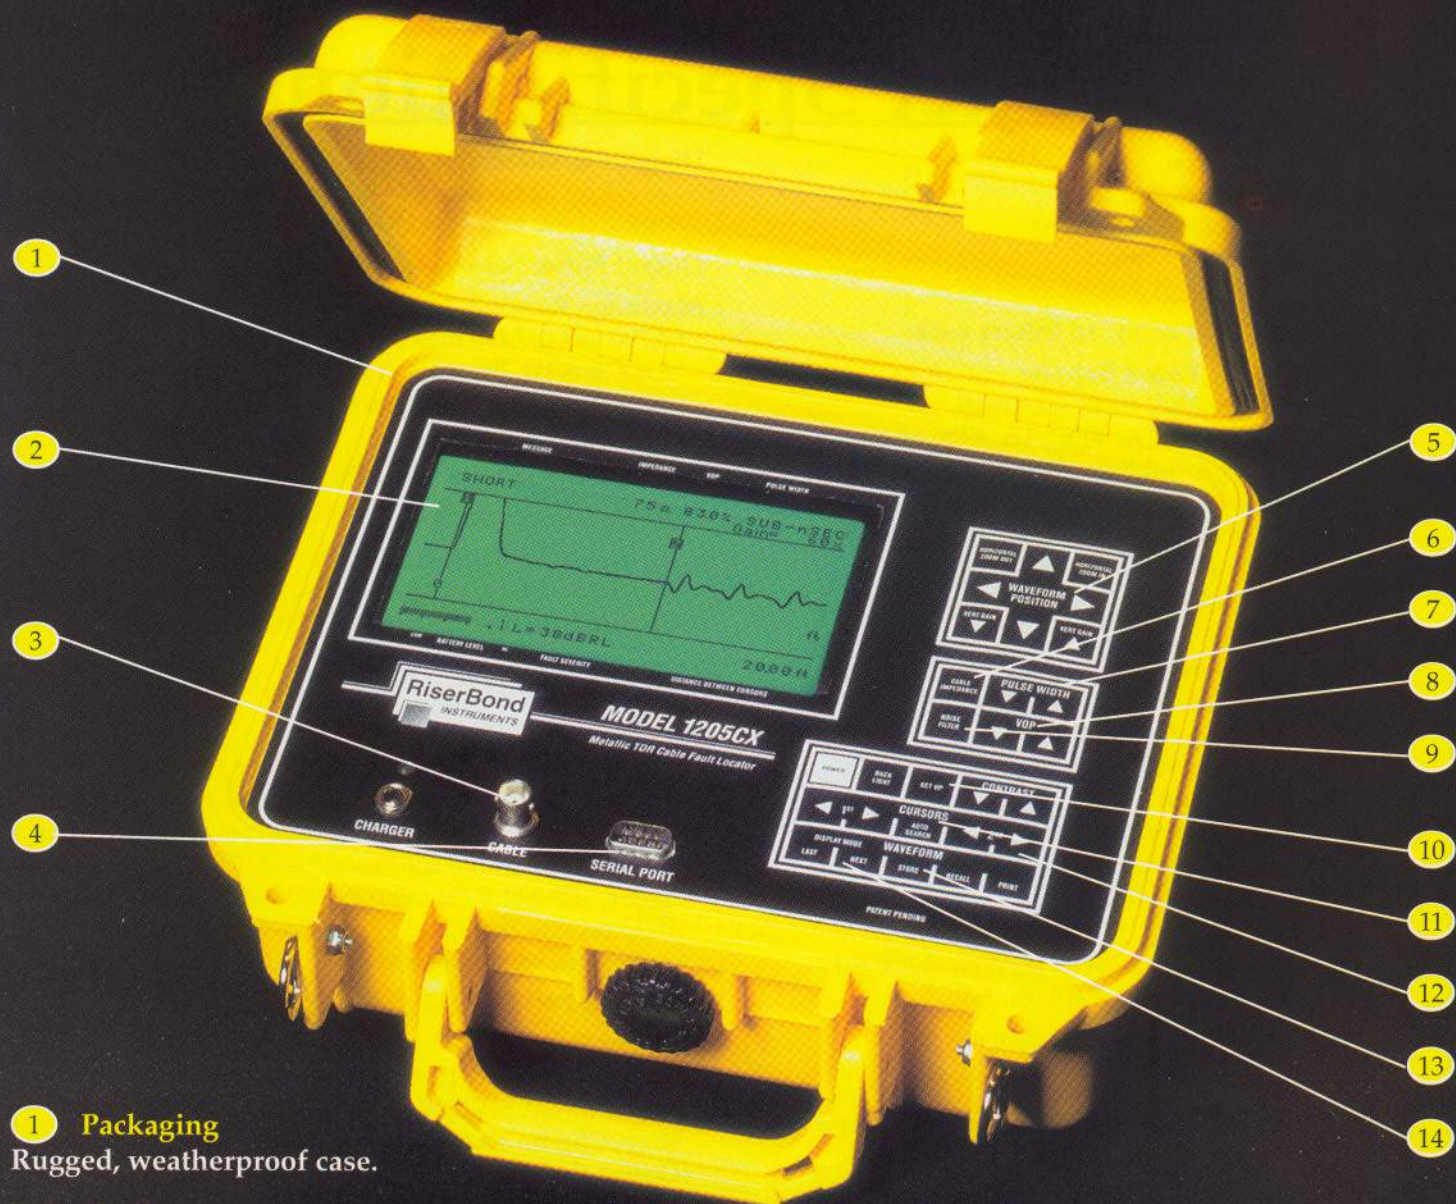

**1 Packaging**  
Rugged, weatherproof case.

**2 Display**  
High contrast liquid crystal display with electroluminescent backlight.

**3 Line Connector**  
BNC input connector for live waveform testing or comparing a live waveform with a stored waveform.

**4 RS-232 Port**  
Transfer cable waveform information to be analyzed, stored, compared, adjusted and printed on your computer.

**5 Waveform Position / Gain**  
Move, expand and contract the waveform vertically or horizontally.

**6 Cable Impedance**  
Selectable output impedance.

**7 Pulse Width**  
Selectable pulse widths for testing various lengths of cable.

**8 VOP**  
Adjustable velocity of propagation allows the operator to test all types of metallic, two-conductor cable.

**9 Noise Filter**  
Multiple filter levels and functions provide unique testing capabilities in noisy environments.

**10 Set Up**  
Specify display preferences and create stored waveform tagging.

**11 AUTO-SEARCH and Range**  
AUTO-SEARCH automatically locates major faults and places the cursors for instant readings. Range steps through preset ranges.

**12 Independent Cursors**  
Cursors can be moved independently for measurement between any two points on the waveform.

**13 SUPER-STORE**  
Store both on and off screen waveform information for more versatile waveform recall, analysis, adjustment and archiving.

**14 Display Mode Next / Last**  
Cycle through various display modes, including a unique INTERMITTENT FAULT mode.



# Product Specifications

## Physical Dimensions:

**Height:** 10.5 inches (267 mm)  
**Width:** 9.75 inches (247.6 mm)  
**Depth:** 5 inches (127 mm)  
**Weight:** 8 lbs (3.6 kg)

**Power:** Lead acid or NiCad battery pack.

## External Charging Power Supply:

**Input:** 110V or 220V (user specified)  
**Output:** 10 to 18 VAC or VDC, 1A, 49 to 62 Hz,  
CE approved if used in the European  
Union. NOTE: The battery charger jack  
is also used to connect chassis to earth  
when using the FP-240 Fused Lead/  
Blocking filter.

## Environmental:

**Operating temperature:**  
0°C (+32°F) to +50°C (+122°F)

**Typical Operating temperature:**  
-15°C (+5°F) to +60°C (+140°F)

**Storage temperature:**  
-20°C (-4°F) to +60°C (+140°F)

**Humidity:** 95% maximum relative humidity,  
non-condensing.

## Altitude:

**Operating:** Sea level to 15,000 ft (4,500 m)

**Non-operating:** 50,000 ft (15,000 m)

**Vertical Sensitivity:** Greater than 65 dB.

**Vertical Resolution:** 14 bits with 93 dots.

**Auto dBRL:** 2 digit auto dBRL calculation at cursor set.

## Display:

128 X 256 dot-matrix, Liquid Crystal Display (LCD)  
with Electroluminescent backlighting.

## Horizontal Resolution:

<2000 ft (610 m): < .05 ft (.02 m) at .990 VOP  
< .02 ft (< .01 m) at .300 VOP

>2000 ft (610 m): 1 ft (.10 m) at any VOP

**Waveform Storage:** All with 14 bit vertical resolution.

<u>Standard</u>	<u>Optional</u>	<u>Samples per waveform</u>
4	16	12,000
8	32	6,000
16	64	3,000

## Distance Accuracy:

+/- .05 ft (.02 m) plus +/- .01% of reading.  
*Accuracy will vary with VOP and cable type.*

**Output Pulse:** Selectable output pulse widths.

## Maximum Range:

63,700 feet (19,400 meters) at .990 VOP

38,600 feet (11,700 meters) at .600 VOP

Maximum testable cable lengths varies with pulse width and cable type.

## Output Impedance:

Front panel selection of 50, 75, 93, and 125 ohm, +/- 5%.

**Output Connector:** Front Panel Female BNC.

## Automatic/Manual Noise Filter:

**Standard:** Two averaging filters.

**Optional:** Multifunction/level filter routines.

## Velocity of Propagation:

Keypad selection from .300 to .990.

## Input Protection:

400 volts (AC+DC) from DC to 400 Hz and decreases to  
10 volts at 1 MHz. **Caution:** Specification for transient  
input protection only. Do not connect to powered cable  
of any kind without the Fused Lead/Blocking filter ac-  
cessory (FP-240, P/N 163-0024-00) available for this type  
of connection. See Fused Lead / Blocking filter operator's  
manual for safety precautions.

**Serial I/O Port:** RS-232

## Accessories:

**Standard:** Battery pack, Battery charger, Connectors,  
Manual, WAVE-VIEW software diskettes, Shoulder  
strap, Clip-on accessory bag.

**Optional:** Custom soft-side carrying case, Strand hooks  
kit, Additional waveform storage, Additional filtering,  
Extended warranty, Fused Lead / Blocking filter.

## Safety:

EN61010-1:1993 inc AMD A2:1995

This equipment has been designed in accordance with  
EN61010-1, safety requirements for electrical equipment  
for measurement, control and laboratory use, installa-  
tion Category III and Pollution Degree 2, and has been  
supplied in a safe condition.

Technological advances allow changes in specifications and/or compo-  
nents. Changes may be made without notification.