

FiberScout®


Handheld Optical Fault Finder

HANDHELD OPTICAL FAULT FINDER

*Priced for
widespread
use in cable
restoration
environment*

FiberScout®

- Simple Symbolic Display
 - Graphics
 - Event Descriptions
- Fast Restoration Capability
- Small, Lightweight, Easy to Handle
- Easy One-button Operation
- Low Cost-High Performance
- Long Range
- Universal Short Range
- Multimode Short Range
- Dual Port Capability
- High Distance Accuracy
- User-selectable Fault Thresholds
- Internal Battery Operation
- Internal Test Result Storage
- RS-232C Output Port: PC Interface, Seiko DPU-201G Printer, Seiko DPU-411 Printer
- PC Interface Software
- Rackmount Available

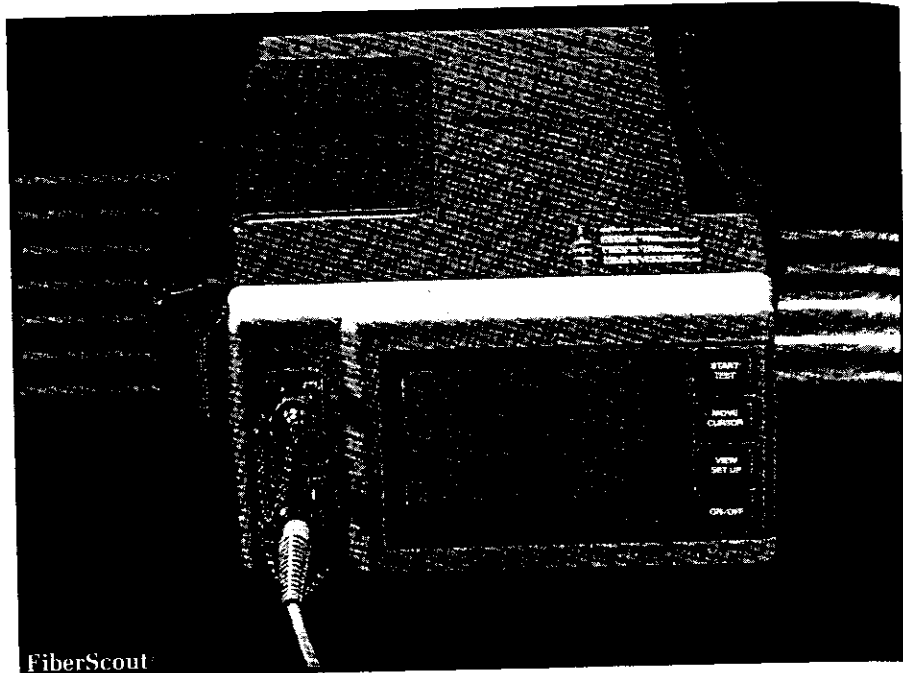

FiberScout®

Weighing just five pounds (2.3 kg.), the battery-operated Tektronix TFS2020 FiberScout reports the status of the fiber through four easy-to-understand symbols.

Designed to locate events and faults in optical cable, the FiberScout is priced for widespread use in the cable restoration environment.

No waveform interpretation is necessary — making the FiberScout so simple to use, it allows fault finding by virtually any user, regardless of the person's level of training.

The FiberScout gives you faster restoration capability and greater service staff effectiveness, since it can be deployed in far greater numbers than the more complex, more expensive OTDRs.

Documentation is fast and simple when using either of the light-weight, portable Seiko thermal printers. FiberScout comes standard with non-volatile memory for internal storage of test results which can later be transferred to a PC.

For advanced documentation and storage needs, we also offer the FSTIP test interface package. Files are saved to the PC in ASCII form, which allows easy analysis of the representative trace and annotations of the results through virtually any word processor.

TD
Product available within
24 hours through
TekDirect
Call 1-800-426-2200.

To order, contact your
local sales office (listed
on the inside back cover)
or call the National
Marketing Center at
1-800-833-9200.

Handheld Optical Fault Finder

FiberScout®

CHARACTERISTICS OPERATING PERFORMANCE*1

	Multimode Short Range	Universal Short Range	Long Range
Operating Distance Range*2	≥3.0 km @ 3.5 dB/km	≥3.0 km @ 2.5 dB/km	≥40.0 km @ 0.4 dB/km
Fault Detection Range (one way)	≥10.5 dB @ 62.5 μm	≥7.5 dB	≥16 dB*3
Distance Measurement Accuracy*4			
To Reflective Event	±2 meters	±2 meters	±5 meters
To Non-Reflective Event	±2 meters	±2 meters	±5 to 20 meters*5
Distance Readout Resolution	1 meter or 1 foot	1 meter or 1 foot	1 meter or 1 foot
Two Event Resolution*6			
Distance to Detect 2nd Reflection	<10 meters	≤10 meters	<40 meters
Loss Measurement Repeatability	±0.2 dB	NA	±0.3 dB
Loss Readout Resolution	0.1 dB	NA	±0.1 dB
Fault Threshold Selections	1, 2, 3, or 4 dB	NA*7	1, 2, 3, or 4 dB
Optical Output Wavelength	835 nm ± 35 nm	835 nm ± 35 nm	1300 nm ± 25 nm
Output Core Size	50 or 62.5 microns	8 to 10 microns	8 to 10 microns
Display	Backlit LCD, Graphics and Text		
Laser Safety	Complies with Class I, 21 CFR 1040.10/1040.11		
Power	Internal Rechargeable NiCad Battery Pack. Typical Operation life between charges: 6 hours. Typical shelf life between charges: 6 months. External AC/DC External Power/Charger Adapter		

*1 In some cases, varying test conditions may affect measurement performance.

*2 With no events present.

*3 At the 4 dB fault threshold setting.

*4 Actual distance accuracy includes: timebase accuracy (±0.005%) quantization error in the Index of Refraction setting.

*5 With extended averaging invoked.

*6 The FiberScout automatically uses the optimal pulse width to separate the loss measurements between two adjacent events.

*7 For singlemode fiber, the FiberScout will report any loss ≥ 1 dB. For multimode fiber, the FiberScout will report any significant fault.

ORDERING INFORMATION

FiberScout®
Handheld Optical Fault Finder. Order TFS2020. **TD MC**
Includes: Battery Pack (146-1000-01); 110 V AC/DC, Power Supply - USA/Canada (119-2731-00); Travel Case (016-1024-00); Accessory Pouch (016-0993-00); Operator Manual and Supplement (070-7167-04); Reference Label (062-9360-01).

With each FiberScout order, select one of the option groups listed below:

Opt. 01 - Equip with Long Range and Universal Short Range Ports **+\$8,200**
Opt. 02 - Equip with Long Range Port **+\$5,000**
Opt. 03 - Equip with Universal Short Range Port **+\$5,200**
Opt. 09 - Equip with Multimode Short Range Port **+\$5,400**
Opt. MC - Equip with Multimode (50 μm) Short Range Port **+\$5,900**
Opt. MM - Equip with Long Range and Multimode (62.5 μm) Short Range Ports **+\$8,500**
Opt. MN - Equip with Long Range and Multimode (50 μm) Short Range Ports **+\$9,000**

AC/DC POWER SUPPLY OPTIONS

The FiberScout is equipped for use in the U.S.A. and Canada. If use is for other than in the U.S.A. or Canada, order one of the following options:

Opt. 1C - 220 V AC/DC Power Supply (Europe)..... **NC**
Opt. 2C - 240 V AC/DC Power Supply (UK)..... **NC**

WARRANTY-PLUS SERVICE OPTIONS

Opt. M7 - Calibration Service..... **+\$165**
Opt. M9 - Repair Protection..... **+\$405**

ADDITIONAL ACCESSORIES

Battery Pack - Order 146-1000-01 **\$115**
110 V AC/DC Power Supply (USA/Canada) - Order 119-2731-00..... **\$30**
Travel Case - Order 016-1024-00*1 **\$105**
Accessory Pouch - Order 016-0993-00 **\$18.75**
Operator Manual and Supplement - Order 070-7167-04*1 **\$23**
Reference Label - Order 062-9360-01*1 **\$5.25**

*1 For more information contact your local sales office or call toll free: 1-800-833-9200.

Note: Units are not modular or customer modifiable. Any change in capability from originally ordered configuration, if available, must be performed by the factory or authorized Tektronix service center. Additional charges will apply.

TD
Product available within 24 hours through TekDirect
Call 1-800-426-2200
 To order, contact your local sales office (listed on the inside back cover) or call the National Marketing Center at 1-800-433-9300.

HANDHELD OPTICAL FAULT FINDER